

## 42" SIDE BY SIDE REFRIGERATOR WITH STAINLESS GLASS DOOR

### TR-42SBS-SG-C

#### FEATURES

- Environmentally friendly, R600a hydrocarbon refrigerant that improves performance and efficiency while ensuring quiet operation.
- Balanced, forced-air refrigeration system enables proper airflow and even temperature throughout to keep food fresh.
- Industry exclusive, 300-series stainless steel interior and exterior.
- All stainless steel, beautifully crafted proud hinges pass True's rigorous one million door opening test.
- Beautifully crafted glass door with stainless steel frame, 120° stay-open feature and ergonomically designed, robust, tubular handles.
- Built-in Ice Maker produces up to 3lbs./day of prism shaped ice with 5 lbs. storage capacity.
- Ramp-up, showcase interior LED lighting provides amazing illumination throughout.
- Intuitive True Precision® Control and readout provides digital accuracy and easy operation.
- Dual evaporator and dual compressor enables dedicated cooling systems for each zone.

#### ORGANIZATION

##### Refrigerator

- 3 adjustable/removable full-depth stainless steel encapsulated glass shelves.
- 1 fixed stainless steel encapsulated glass shelf.
- 3 full-extension, soft-close drawer bins.

##### Freezer

- 3 adjustable/removable electro-polished stainless steel wire shelves.
- 1 fixed electro-polished stainless steel wire shelf.
- 3 full-extension, soft-close wire bins.
- Built-in Ice Maker.

#### BUILD YOUR TRUE

Customize your True with a variety of finish and hardware options at [true-residential.com](http://true-residential.com).

CUSTOMIZATION




#### SPECIFICATIONS

Dimensions* (w x h x d)	42" x 84" x 24"
Cutout Dimensions (w x h x d)	
Flush Opening	42¼" x 84¼" x 26"
Standard Opening	41½" x 83¾" x 24"
Capacity (cu. ft.) – Refrigerator	16.2
Capacity (cu. ft.) – Freezer	8.8
Temperature Range – Refrigerator	33°F – 42°F
Temperature Range – Freezer	-4°F – 4°F
Water Supply	¼" O.D. braided stainless steel or PEX tubing (¼" O.D. lines and fittings not included). <b>Note:</b> Copper line is not recommended.
Flow Rate (gpm/lpm)	0.5 / 1.89
Operating Pressure psi (kPa)	30 (207) – 100 (689)
Incoming Water Temperature	33 – 100°F (0.6 – 38°C)
Weight (lbs.)	720
Voltage	115/60/1  115/60/1 NEMA-5-15R
Amps	5.2
Annual Energy Consumption (kwh)	562
Refrigerant Type	r600a
Power Cord Length (ft.)	9
Energy Star Rated	No

\*Dimensions may vary +/- 1/8"

## 42" SIDE BY SIDE REFRIGERATOR WITH STAINLESS GLASS DOOR

### TR-42SBS-SG-C

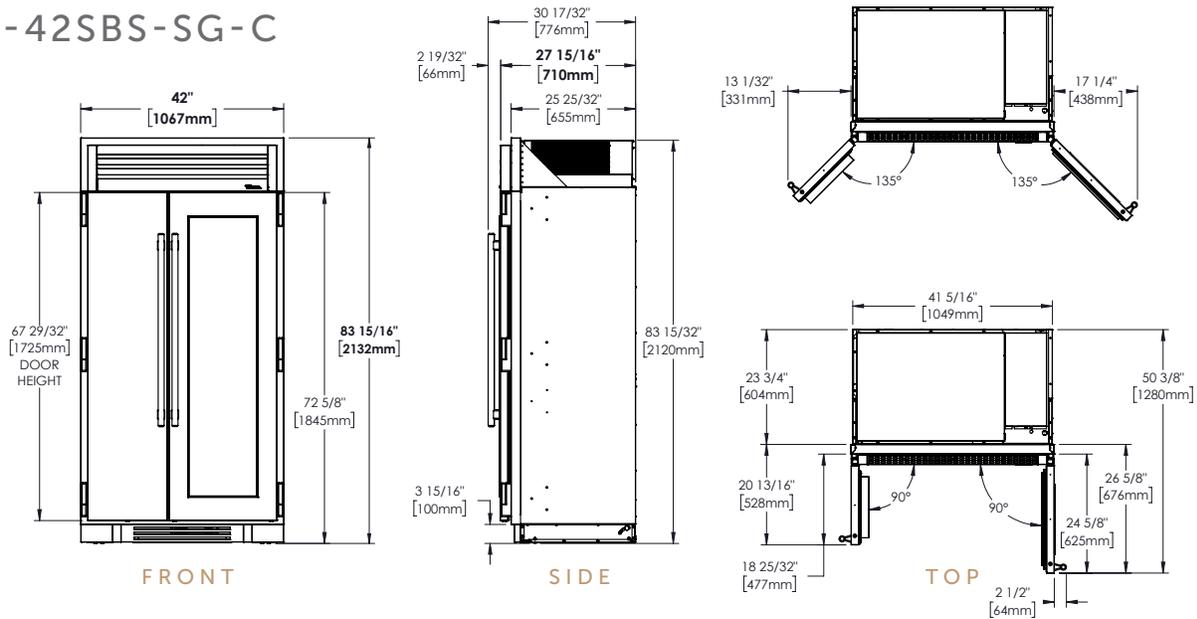

### OPENING DIMENSIONS


#### FLUSH OPENING

WIDTH	HEIGHT	DEPTH
42 1/4"	84 1/4"	26"

#### STANDARD OPENING\*

WIDTH	HEIGHT	DEPTH
41 1/2"	83 3/4"	24"

\*Standard Opening dimensions apply to models produced after April 2024. Please consult factory for clarification / questions.

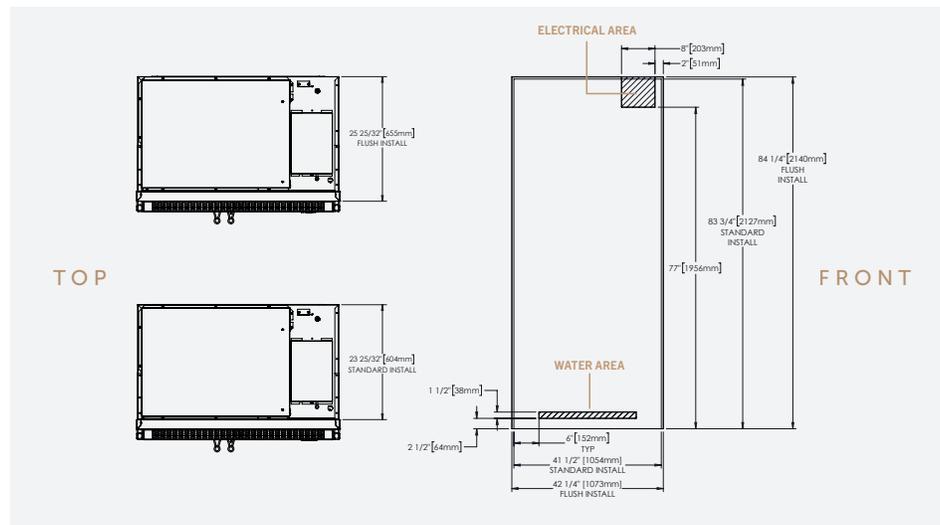

### MODEL OPTIONS

MODEL	FINISH
TR-42SBS-SG-C	Stainless glass door
TR-42SBS-SS-C	Stainless solid door

### ACCESSORIES (OPTIONAL)

- Side panel(s)
- Joining kits

### WARRANTY

- 3 year full (parts & labor)
- 6 year sealed system (parts & labor)
- 7-12 year (parts only – sealed system on registered products)

