

## 15" OVERLAY READY DOOR CLEAR ICE MACHINE

# TUI-15-R/L-OP-D

TUI-15-R-OP-D (Right hinged)

TUI-15-L-OP-D (Left hinged)

## **FEATURES**

- Articulating, soft close hinge allows fully integrated, flexible installations.
- Field-reversible hinge for Overlay Panel Ready models allows for flexibility in the field.
- Environmentally friendly R290 refrigerant.
- Produces up to 85lbs. of clear ice per day with a storage capacity of 28lbs.
- Bin Level Control for entertaining flexibility (50%, 65%, 70%, 85%, 100%).
- Patented TruLumina® LED lighting gently illuminates your product and allows you to choose from 14 different color options with the push of a button.
- True Precision Control® with steel touch technology and readout provides ice cycle status.
- Exclusive True Magna Scoop for easy storage on door.
- Industry exclusive, standard built-in drain pump.
- Built-in water filter rated up to 1250 gallons.
- · Automatic cleaning system.
- All undercounter models UL rated for outdoor use.
- Energy Star rated.
- NSF rated.
- 3 year full warranty and 6 year parts/labor warranty on sealed system.

## **BUILD YOUR TRUE**

Customize your True with a variety of finish and hardware options at **true-residential.com/custom**.

















TUI-15-R-OP-D

## **SPECIFICATIONS**


Dimensions (w x h x d)	14%" x 34¼" x 23%"
Cutout Dimensions (w x h x d)	15" x 34½" x 24"
Standard Overlay Panel (w x h x d)	14 <sup>5</sup> /8" x 30 <sup>1</sup> /8" x <sup>3</sup> /4"
Panel provided by others. Other install Consult install guide for details.	ation options available.
Operating Requirements Air Temperature Water Temperature Water Pressure  Maximum Ice Capacity (Ibs/day) Rated Ice Capacity (Ibs/day) Rated Ice Storage (Ibs) Rated Energy Consumption (kWh/lbs) Rated Water Consumption (Gal/lbs)	40°F - 100°F 40°F - 100°F 20 - 80 PSIG 85 75 28 6.95 / 100 25 / 100
Plumbing	Water Supply: ¼" OD copper, braided stainless steel or PEX tubing and compression fittings (not included).  Drain Pump Connection: ½" NPT.
Weight (lbs.)	125
Voltage	115/60/1 115/60/1 NEMA-5-15R
Amps	15
Power Cord Length (ft.)	8
F 01 D 1 1	

Yes

**Energy Star Rated** 



# TUI-15-R/L-OP-D — (shown with a $\frac{3}{4}$ " cabinetry panel)

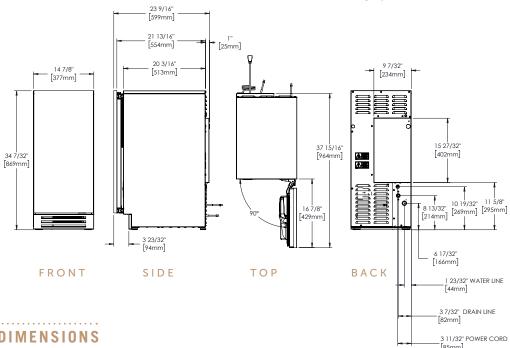

## **OPENING DIMENSIONS**



## **MODEL OPTIONS**

MODEL	FINISH
• • • • • • • • • • • • • • • • • • • •	• • • • • • • • • • • • • • • • • • • •
TUI-15-R-OP-D	Overlay panel right-hinged
• • • • • • • • • • • • • • • • • • • •	• • • • • • • • • • • • • • • • • • • •
TUI-15-L-OP-D	Overlay panel left-hinged

## ACCESSORIES (OPTIONAL)

Descaling solution
Replacement water filter
•••••••••••••••••••••••••••••••••••••••
Anti-condensation pads

## WARRANTY

3 year full (parts & labor) 6 year sealed system (parts & labor)