

### 15" STAINLESS SOLID DOOR CLEAR ICE MACHINE

## TUI-15-R/L-SS-D

TUI-15-R-SS-D (Right hinged)

TUI-15-L-SS-D (Left hinged)

## **FEATURES**

- Environmentally friendly, R600a hydrocarbon refrigerant that improves performance and efficiency while ensuring quiet operation.
- Articulating, soft close hinge allows fully integrated, flexible installations.
- Produces up to 85lbs. of clear ice per day with a storage capacity of 28lbs.
- Bin Level Control for entertaining flexibility (50%, 65%, 70%, 85%, 100%).
- Patented TruLumina® LED lighting gently illuminates your product and allows you to choose from 14 different color options with the push of a button.
- True Precision Control® with steel touch technology and readout provides ice cycle status.
- Exclusive True Magna Scoop for easy storage on door.
- Industry exclusive, standard built-in drain pump.
- Built-in water filter rated up to 1250 gallons.
- · Automatic cleaning system.
- All undercounter models UL rated for outdoor use.
- Energy Star rated.
- 3 year full warranty and 6 year parts/labor warranty on sealed system.

### **BUILD YOUR TRUE**

Customize your True with a variety of finish and hardware options at **true-residential.com**.

## CUSTOMIZATION




## **SPECIFICATIONS**

Dimensions* (w x h x d)	14 <sup>7</sup> / <sub>8</sub> " x 34 <sup>1</sup> / <sub>4</sub> " x 23 <sup>7</sup> / <sub>8</sub> "	
Cutout Dimensions (w x h x d)	15" x 34½" x 24"	
Operating Requirements Air Temperature Water Temperature Water Pressure	40°F – 100°F 40°F – 100°F 20 – 80 PSIG	
Maximum Ice Capacity (Ibs/day) Rated Ice Capacity (Ibs/day) Rated Ice Storage (Ibs) Rated Energy Consumption (kWh/lbs) Rated Water Consumption (Gal/Ibs)	85 75 28 6.95 / 100 25 / 100	
Plumbing	Water Supply: ½" OD copper, braided stainless steel or PEX tubing and compression fittings (not included).  Drain Pump Connection: ½" NPT.	
riuiiiuiig		
Weight (Ibs.)		
	Drain Pump Connection: 1/2" NPT.	
Weight (lbs.)	Drain Pump Connection: 1/2" NPT.	
Weight (lbs.) Voltage	Drain Pump Connection: 1/2" NPT.  125  115/60/1 115/60/1 NEMA-5-15R	

\*Dimensions may vary +/-  $^{1}/_{8}$ "



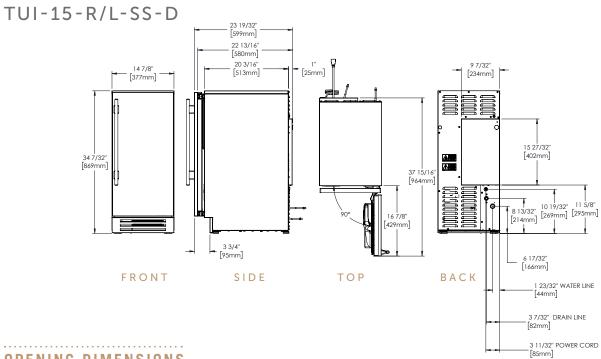

## **OPENING DIMENSIONS**



# **MODEL OPTIONS**

MODEL	FINISH
TUI-15-R-SS-D	Stainless solid door right-hinged
TUI-15-L-SS-D	Stainless solid door left-hinged

## ACCESSORIES (OPTIONAL)

Ice scoop
Descaling solution
•••••
Replacement water filter
•••••
Anti-condensation pads

## WARRANTY

- 3 year full (parts & labor)
- 6 year sealed system (parts & labor)



