

24" OVERLAY READY DOOR BEVERAGE DISPENSER

TUR-24BD-R/L-OP-C

TUR-24BD-R-OP-C (Right hinged)

TUR-24BD-L-OP-C (Left hinged)

FEATURES

- Environmentally friendly, R600a hydrocarbon refrigerant that improves performance and efficiency while ensuring quiet operation.
- Industry exclusive, 300-series stainless steel interior.*
- Zero-clearance hinging allows for integrated installation.
- Patented TruLumina[®] LED lighting gently illuminates your product and allows you to choose from 14 different color options with the push of a button.
- True Precision Control[®] with steel touch technology and readout provides digital accuracy.
- Balanced, forced-air refrigeration system enables rapid product pull down and even temperature throughout.
- NSF/ANSI Standard 7 compliant for packaged food product.
- Sabbath mode compliant.
- All undercounter models UL rated for outdoor use.
- Exclusive airflow technology provides the perfect serve every time.
- Standard with draft tower, CO₂ tank, CO₂ regulator valve, and low profile Sankey tapper.
- Single tap unit accommodates (1) short ¼ barrel, (1) slim ¼ barrel, or (1) ¼ barrel.
- Complies with NSF/ANSI Standard 7 for packaged food product.

ORGANIZATION

• 1 wire step shelf (for quarter barrel keg).

BUILD YOUR TRUE

Customize your True with a variety of finish and hardware options at **true-residential.com**.

CUSTOMIZATION



SPECIFICATIONS

| Dimensions* (w x h x d) | 23 %" x 34 ¼" x 23 %" | |
|---|--|--|
| Cutout Dimensions (w x h x d) | 24" x 34½" x 24" | |
| Standard Overlay Panel (w x h x d) | 23 ⁵ /8" x 30 ¹ /8" x ³ /4" | |
| Panel provided by others. Other installation options available. Consult install guide for details. | | |
| Capacity (cu. ft.) | 5.75 X 137 | |
| Temperature Range | 33°F - 47°F | |
| Weight (Ibs.) | 185 | |
| Voltage | 115/60/1 (115/60/1 NEMA-5-15R | |
| Amps | 1.9 | |
| Annual Energy Consumption (kwh) | 279 | |
| Power Cord Length (ft.) | 8 | |
| Energy Star Rated | Yes | |

*NOTE: Overlay models have black powder coated steel exteriors.

*Dimensions may vary +/- $^{1\!/_{8}"}$


2001 East Terra Lane I O'Fallon, M0 63366-4434 | p 636.240.2400 | f 636.272.7546 | true-residential.com | info@true-residential.com

Specifications subject to change without notice.



24" OVERLAY READY DOOR BEVERAGE DISPENSER

TUR-24BD-R/L-OP-C - (shown with a ³/₄" cabinetry panel)

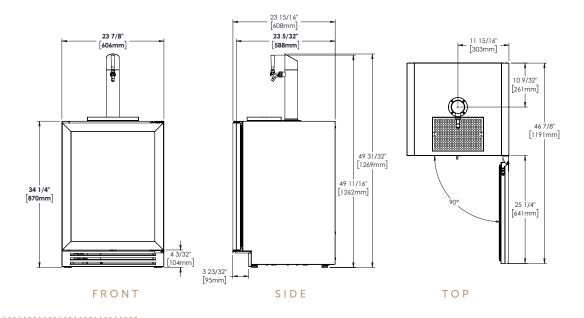

OPENING DIMENSIONS



MODEL OPTIONS

| MODEL | FINISH |
|-----------------|---------------------------------|
| TUR-24BD-R-OP-C | Overlay solid door right-hinged |
| TUR-24BD-L-OP-C | Overlay solid door left-hinged |

ACCESSORIES (OPTIONAL)

| Anti-condensation pads | |
|---|--|
| | |
| Nitro coffee kit — single tap | |
| ••••••••••••••••••••••••••••••••••••••• | |
| Beer line cleaning kit | |
| ••••••••••••••••••••••••••••••••••••••• | |

WARRANTY

- 3 year full (parts & labor)
- 6 year sealed system (parts & labor)
- 7–12 year (parts only sealed system on registered products)

2001 East Terra Lane I O'Fallon, MO 63366-4434 | p 636.240.2400 | f 636.272.7546 | true-residential.com | info@true-residential.com

Intertek

Intertek

Specifications subject to change without notice.