

15" STAINLESS SOLID DOOR CLEAR ICE MACHINE - ADA

TUIADA-15-RS/LS-A~S

TUIADA-15-RS-A~S (Right hinged)

TUIADA-15-LS-A~S (Left hinged)

FEATURES

- Articulating, soft close hinge allows fully integrated, flexible installations.
- Produces up to 75lbs. of clear ice per day with a storage capacity of 28lbs.
- Bin Level Control for entertaining flexibility (50%, 65%, 70%, 85%, 100%).
- Patented TruLumina® LED lighting gently illuminates your product and allows you to choose from 14 different color options with the push of a button.
- Concealed digital control located behind toekick.
- Exclusive True Magna Scoop for easy storage on door.
- Industry exclusive, standard built-in drain pump.
- External water filter kit included rated up to 1250 gallons.
- Automatic cleaning system.
- All undercounter models UL rated for outdoor use.
- Environmentally friendly R290 refrigerant.
- Energy Star rated.

BUILD YOUR TRUE

Customize your True with a variety of finish and hardware options at **true-residential.com/custom**.














TUIADA-15-RS-A~S

SPECIFICATIONS

Dimensions (w x h x d)	14%" x 31%" x 23 ¹⁹ / ₃₂ "
Cutout Dimensions (w x h x d)	15" x 32" x 24"
Operating Requirements Air Temperature Water Temperature Water Pressure (PSIG)	40°F – 100°F 40°F – 100°F 20 – 80
Maximum Ice Capacity (Ibs/day) Rated Ice Capacity (Ibs/day) Rated Ice Storage (Ibs) Rated Energy Consumption (kWh/lbs) Rated Water Consumption (Gal/lbs)	75 75 28 6.65 / 100 24.2 / 100
	Water Supply: 1/4" OD copper,
Plumbing	braided stainless steel or PEX tubing and compression fittings (not included). Drain Pump Connection: 1/2" NPT.
Plumbing Weight (lbs.)	braided stainless steel or PEX tubing and compression fittings (not included).
	braided stainless steel or PEX tubing and compression fittings (not included). Drain Pump Connection: 1/2" NPT.
Weight (lbs.)	braided stainless steel or PEX tubing and compression fittings (not included). Drain Pump Connection: ½" NPT.
Weight (lbs.) Voltage	braided stainless steel or PEX tubing and compression fittings (not included). Drain Pump Connection: 1/2" NPT. 140 115/60/1



TUIADA-15-RS/LS-A~S

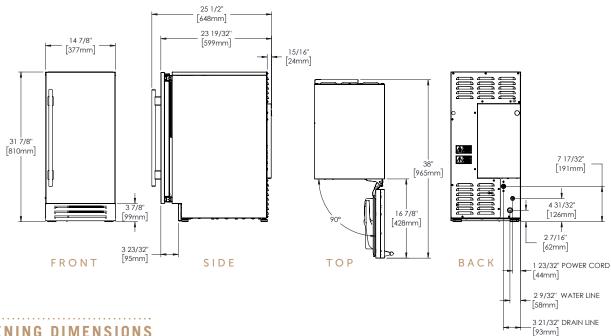

OPENING DIMENSIONS



MODEL OPTIONS

	MODEL	FINISH
0		
	TUIADA-15-RS-A~S	Stainless solid door right-hinged
	TUIADA-15-LS-A~S	Stainless solid door left-hinged

ACCESSORIES (OPTIONAL)

Descaling solution	
Replacement water filter	
• • • • • • • • • • • • • • • • • • • •	
Anti-condensation pads	

WARRANTY

2 year full (parts & labor) 5 year sealed system (parts & labor)