

## 30" REFRIGERATOR WITH BOTTOM FREEZER & STAINLESS SOLID DOOR

### TR-30RBF-R/L-SS-A

TR-30RBF-R-SS-A (Right hinged)

TR-30RBF-L-SS-A (Left hinged)

#### FEATURES

- Environmentally friendly, R600a hydrocarbon refrigerant that improves performance and efficiency while ensuring quiet operation.
- Industry exclusive, 300-series stainless steel interior and exterior.
- All stainless steel, beautifully crafted proud hinges pass True's rigorous one million door opening test.
- Ramp-up, showcase interior LED lighting provides amazing illumination throughout.
- Balanced refrigeration system with cascade airflow that enables even temperature throughout to keep food fresh.
- Built-in Ice Maker produces up to 3lbs./day of prism shaped ice with 5 lbs. storage capacity.
- 120° stay-open feature and ergonomically designed, robust, tubular handles.
- Dual evaporator and dual compressor enable dedicated cooling systems for each zone.

#### ORGANIZATION

##### Refrigerator

- 2 adjustable/removable door bins that allow for additional storage/organization.
- 2 adjustable/ removable stainless steel encapsulated glass full-width shelves.
- 1 fixed stainless steel encapsulated full-width glass shelf.
- 2 full-extension/full-width drawers.

##### Freezer

- 2 tiered drawers with nested pull-out drawer and top shelf.
- Built-in Ice Maker.


#### BUILD YOUR TRUE

Customize your True with a variety of finish and hardware options at [true-residential.com](http://true-residential.com).

CUSTOMIZATION




#### SPECIFICATIONS

Dimensions* (w x h x d)	30" x 84" x 24"
Cutout Dimensions (w x h x d) Flush Opening Standard Opening	30¼" x 84¼" x 26" 29½" x 83¾" x 24"
Total Capacity (cu. ft.) Capacity (cu. ft.) – Refrigerator Capacity (cu. ft.) – Freezer	17.7 13.6 4.1
Temperature Range – Refrigerator Temperature Range – Freezer	33°F – 42 °F -4°F – 4°F
Water Supply	¼" O.D. braided stainless steel or PEX tubing (¼" O.D. lines and fittings not included). <b>Note:</b> Copper line is not recommended.
Flow Rate (gpm/lpm)	0.5 / 1.89
Operating Pressure psi (kPa)	30 (207) – 100 (689)
Incoming Water Temperature	33 – 100°F (0.6 – 38°C)
Weight (lbs.)	570
Voltage	115/60/1  115/60/1 NEMA-5-15R
Amps	1.8
Annual Energy Consumption (kwh)	535
Refrigerant Type	r600a
Power Cord Length (ft.)	9
Energy Star Rated	Yes

\*Dimensions may vary +/- 1/8"

# 30" REFRIGERATOR WITH BOTTOM FREEZER & STAINLESS SOLID DOOR

## TR-30RBF-R/L-SS-A

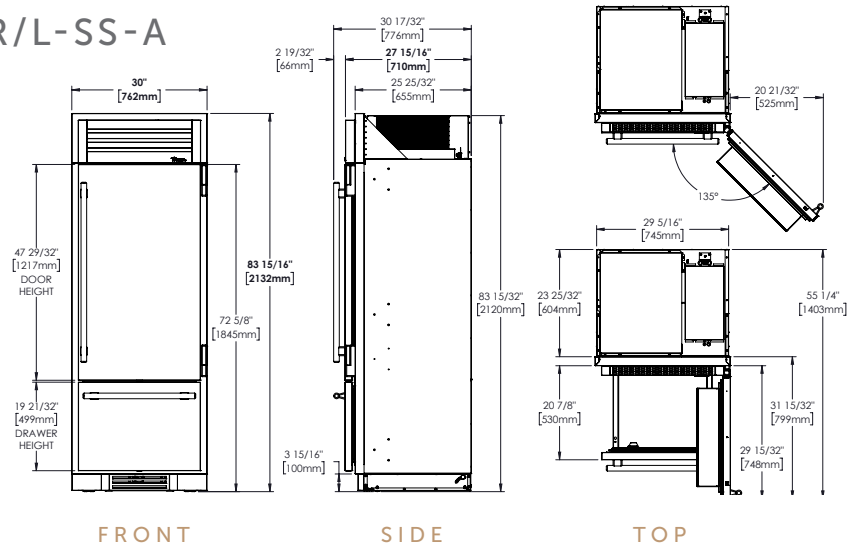

## OPENING DIMENSIONS


### FLUSH OPENING

WIDTH	HEIGHT	DEPTH
30 3/4"	84 1/4"	26"

### STANDARD OPENING\*

WIDTH	HEIGHT	DEPTH
29 1/2"	83 3/4"	24"

\*Standard Opening dimensions apply to models produced after April 2024. Please consult factory for clarification / questions.

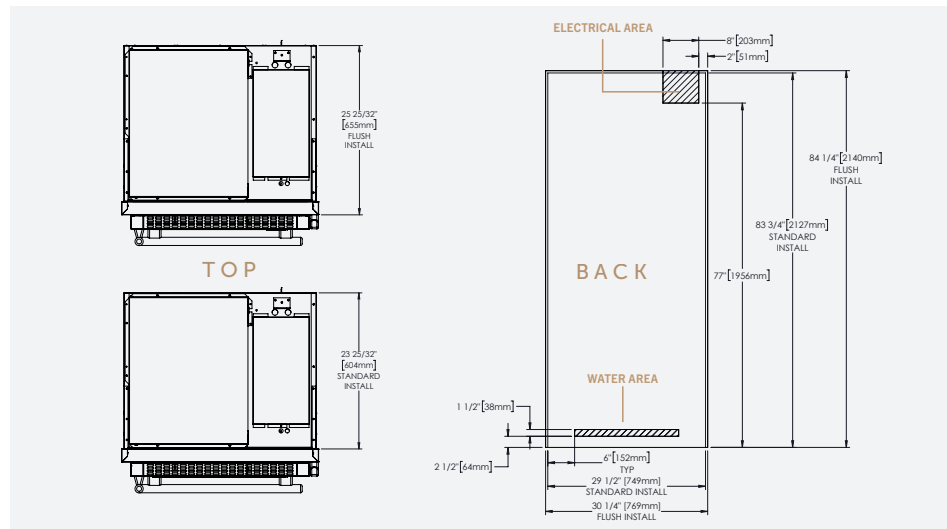

## MODEL OPTIONS

MODEL	FINISH
TR-30RBF-R-SS-A	Stainless solid door right-hinged
TR-30RBF-L-SS-A	Stainless solid door left-hinged

## NOTE

If joining with or installing next to another True Column or Side-by-Side, the True Column or Side-by-Side must be special ordered in order for the handles to align. Consult install guide for questions.



## ACCESSORIES (OPTIONAL)

- Joining kit
- Side panel(s)
- 90° door stop
- Full size anti-condensation pad

## WARRANTY

- 3 year full (parts & labor)
- 6 year sealed system (parts & labor)
- 7-12 year (parts only – sealed system on registered products)