

24" DUAL ZONE WINE COLUMN WITH STAINLESS GLASS DOOR

TR-24DZW-R/L-SG-A

TR-24DZW-R-SG-A (Right hinged)

TR-24DZW-L-SG-A (Left hinged)

FEATURES

- Environmentally friendly, R600a hydrocarbon refrigerant that improves performance and efficiency while ensuring quiet operation.
- Industry exclusive, 300-series stainless steel interior and exterior.
- All stainless steel, beautifully crafted proud hinges pass True's rigorous one million door opening test.
- Beautifully crafted solid stainless steel door with 120° stayopen feature and ergonomically designed, robust, tubular handle.
- Commercially inspired lift-up grill on top of the unit with toe kick that complements the look of True's undercounter units.
- Patented TruLumina® LED lighting gently illuminates your product and allows you to choose from 14 different color options with the push of a button.
- Low-E, double pane, UV tinted glass.
- Intuitive True Precision® Control and readout provides digital accuracy and easy operation.
- 2 independent zones with dual evaporators that can be adjusted from 40°F (4.4°C) to 65°F (18.3°C).
- Full extension wine racks with unfinished cherry fronts that cradle your wine and prevent vibration.
- Display shelf that proudly displays your collection along with additional storage behind display.
- Optional Lock available must be ordered from factory.

ORGANIZATION

• 15 full-extension, soft-close wine racks - 150 bottles.

BUILD YOUR TRUE

Customize your True with a variety of finish and hardware options at **true-residential.com**.

CUSTOMIZATION




SPECIFICATIONS

Dimensions* (w x h x d)	24" x 84" x 24"
Cutout Dimensions (w x h x d) Flush Opening Standard Opening	24¼" x 84¼" x 26" 23½" x 83¾" x 24"
Capacity (cu. ft.)	15.4 × 105
Temperature Range	2 independent zones that can be adjusted from 40°F (4.4°C) to 65°F (18.3°C).
Weight (lbs.)	TBD
Voltage	115/60/1 115/60/1 NEMA-5-15R
Amps	0.9
Annual Energy Consumption (kwh)	249
Power Cord Length (ft.)	10
Energy Star Rated	Yes

*Dimensions may vary +/- $\frac{1}{8}$ "



TR-24DZW-R/L-SG-A

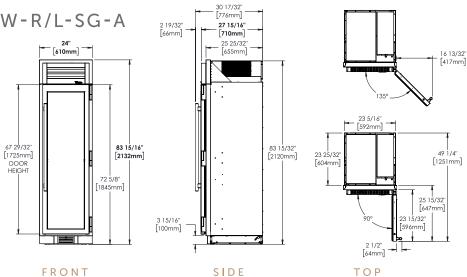

OPENING DIMENSIONS

FLUSH OPENING

WIDTH	HEIGHT	DEPTH	
		• • • • • • • • • • • •	
241/4"	84 1/4"	26"	

STANDARD OPENING*

WIDTH	HEIGHT	DEPTH
• • • • • • • • • • • • • • • • • • • •		
231/2"	83¾"	24"

^{*}Standard Opening dimensions apply to models produced after April 2024. Please consult factory for clarification / questions.

ELECTRICAL AREA 8"[203mm] -----2"[51mm] 84 1/4"[2140mm] TOP FRONT 77"[19 23 1/2" [597mm] STANDARD INSTALL _24 1/4" [616mm]_ FLUSH INSTALL

MODEL OPTIONS

	MODEL	FINISH
0		
	TR-24DZW-R-SG-A	Stainless glass door right-hinged
0		
	TR-24DZW-L-SG-A	Stainless glass door left-hinged

ACCESSORIES (OPTIONAL)

Joining kit
Side panel(s)
Full size anti-condensation pad
Optional Lock — must be ordered from factory.

WARRANTY

- 3 year full (parts & labor)
- 6 year sealed system (parts & labor)
- 7-12 year (parts only sealed system on registered products)



