

## 24" FREEZER COLUMN WITH INTEGRATED ICE MAKER

### TR-24FRZ-R/L-SS-IM-A

TR-24FRZ-R-SS-IM-A (Right hinged, integrated ice maker)

TR-24FRZ-L-SS-IM-A (Left hinged, integrated ice maker)

#### FEATURES

- Environmentally friendly R600a refrigerant
- Balanced, forced-air refrigeration system enables proper airflow and even temperature throughout to keep food fresh.
- Industry exclusive, 300-series stainless steel interior and exterior.
- All stainless steel, beautifully crafted proud hinges pass True's rigorous one million door opening test.
- Beautifully crafted solid stainless steel door with 120° stay-open feature and ergonomically designed, robust, tubular handle.
- Built-in Ice Maker produces up to 3lbs./day of prism shaped ice with 5 lbs. storage capacity.
- Ramp-up, showcase interior LED lighting provides amazing illumination throughout.
- Intuitive True Precision® Control and readout provides digital accuracy and easy operation.
- Temperature as low as -4°F.

#### ORGANIZATION

- 3 adjustable/removable electro-polished stainless steel wire shelves.
- 1 fixed electro-polished stainless steel wire shelves.
- 3 full-extension, soft-close wire bins.


#### BUILD YOUR TRUE

Customize your True with a variety of finish and hardware options at [true-residential.com](http://true-residential.com).

CUSTOMIZATION




#### SPECIFICATIONS

Dimensions* (w x h x d)	24" x 84" x 24"
Cutout Dimensions (w x h x d) Flush Opening Standard Opening	24¼" x 84¼" x 26" 23½" x 83¾" x 24"
Capacity (cu. ft.)	12.4
Temperature Range	-4°F – 4°F
Water Supply	¼" O.D. braided stainless steel or PEX tubing (¼" O.D. lines and fittings not included). <b>Note:</b> Copper line is not recommended.
Flow Rate (gpm/lpm)	0.5 / 1.89
Operating Pressure psi (kPa)	30 (207) – 100 (689)
Incoming Water Temperature	33 – 100°F (0.6 – 38°C)
Weight (lbs.)	460
Voltage	115/60/1  115/60/1 NEMA-5-15R
Amps	2.9
Annual Energy Consumption (kwh)	458
Power Cord Length (ft.)	10
Energy Star Rated	Yes

\*Dimensions may vary +/- 1/8"

# 24" FREEZER COLUMN WITH INTEGRATED ICE MAKER

## TR-24FRZ-R/L-SS-IM-C

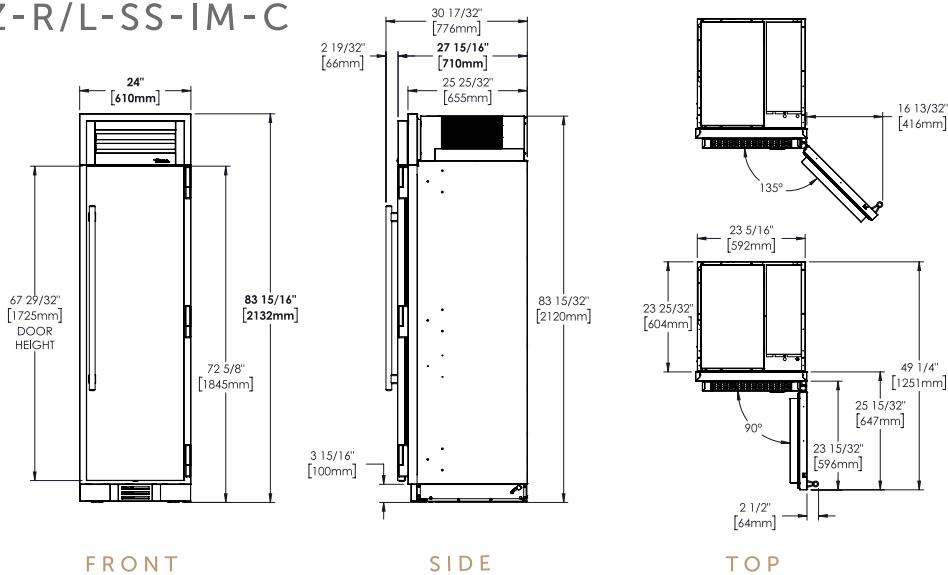

## OPENING DIMENSIONS


### FLUSH OPENING

WIDTH	HEIGHT	DEPTH
24 1/4"	84 1/4"	26"

### STANDARD OPENING\*

WIDTH	HEIGHT	DEPTH
23 1/2"	83 3/4"	24"

\*Standard Opening dimensions apply to models produced after April 2024. Please consult factory for clarification / questions.

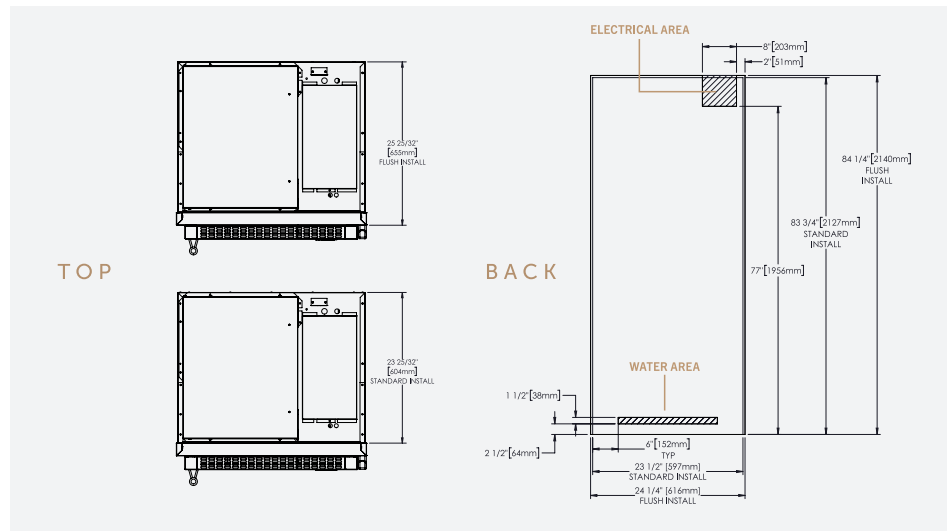

## MODEL OPTIONS

MODEL	FINISH
TR-24FRZ-R-SS-IM-A	Stainless solid door, right-hinged, integrated ice maker
TR-24FRZ-L-SS-IM-A	Stainless solid door, left-hinged, integrated ice maker

## ACCESSORIES (OPTIONAL)

- Joining kit
- Side panel(s)
- Full size anti-condensation pad

## WARRANTY

- 3 year full (parts & labor)
- 6 year sealed system (parts & labor)
- 7-12 year (parts only – sealed system on registered products)

